



Data Mining

Practical Machine Learning Tools and Techniques

Slides for Chapter 7 of *Data Mining* by I. H. Witten and E. Frank

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

1



Engineering the input and output

- Attribute selection
 - Scheme-independent, scheme-specific
- Attribute discretization
 - Unsupervised, supervised, error- vs entropy-based, converse of discretization
- Data transformations
 - Principal component analysis, random projections, text, time series
- Dirty data
 - Data cleansing, robust regression, anomaly detection
- Meta-learning
 - Bagging (with costs), randomization, boosting, additive (logistic) regression, option trees, logistic model trees, stacking, ECOCs
- Using unlabeled data
 - Clustering for classification, co-training, EM and co-training

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

2



Just apply a learner? NO!

- Scheme/parameter selection
 - treat selection process as part of the learning process**
- Modifying the input:
 - Data engineering to make learning possible or easier
- Modifying the output
 - Combining models to improve performance

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

3



Attribute selection

- Adding a random (i.e. irrelevant) attribute can significantly degrade C4.5's performance
 - Problem: attribute selection based on smaller and smaller amounts of data
- IBL very susceptible to irrelevant attributes
 - Number of training instances required increases exponentially with number of irrelevant attributes
- Naïve Bayes doesn't have this problem
- Relevant attributes can also be harmful

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

4



Scheme-independent attribute selection

- Filter approach:** assess based on general characteristics of the data
- One method: find smallest subset of attributes that separates data
- Another method: use different learning scheme
 - e.g. use attributes selected by C4.5 and 1R, or coefficients of linear model, possibly applied recursively (*recursive feature elimination*)
- IBL-based attribute weighting techniques:
 - can't find redundant attributes (but fix has been suggested)
- Correlation-based Feature Selection (CFS):
 - correlation between attributes measured by *symmetric uncertainty*:
$$U(A, B) = 2^{\frac{H(A) + H(B) - H(A, B)}{H(A) + H(B)}} \in [0, 1]$$
 - goodness of subset of attributes measured by (breaking ties in favor of smaller subsets):
$$\sum_j U(A_j, C) / (\sum_i \sum_j U(A_i, A_j))$$


03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

5



Attribute subsets for weather data

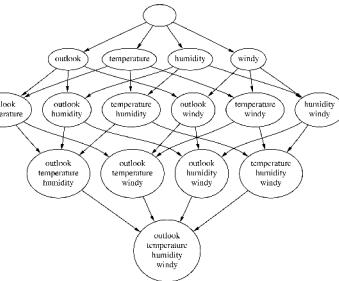

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

6



Searching attribute space

- Number of attribute subsets is exponential in number of attributes
- Common greedy approaches:
 - forward selection
 - backward elimination
- More sophisticated strategies:
 - Bidirectional search
 - Best-first search: can find optimum solution
 - Beam search: approximation to best-first search
 - Genetic algorithms

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

7



Scheme-specific selection

- Wrapper approach to attribute selection
- Implement “wrapper” around learning scheme
 - Evaluation criterion: cross-validation performance
- Time consuming
 - greedy approach, k attributes $\Rightarrow k^2 \times$ time
 - prior ranking of attributes \Rightarrow linear in k
- Can use significance test to stop cross-validation for subset early if it is unlikely to “win” (race search)
 - can be used with forward, backward selection, prior ranking, or special-purpose schemata search
- Learning decision tables: scheme-specific attribute selection essential
- Efficient for decision tables and Naïve Bayes

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

8



Formula for MDLP

- N instances
- Original set: k classes, entropy E
- First subset: k_1 classes, entropy E_1
- Second subset: k_2 classes, entropy E_2

$$gain > \frac{\log_2(N-1)}{N} + \frac{\log_2(3^k-2)}{N} - kE + k_1E_1 + k_2E_2$$

- Results in *no* discretization intervals for temperature attribute

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

13



Supervised discretization: other methods

- Can replace top-down procedure by bottom-up method
- Can replace MDLP by chi-squared test
- Can use dynamic programming to find optimum k -way split for given additive criterion
 - Requires time quadratic in the number of instances
 - But can be done in linear time if error rate is used instead of entropy

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

14



Error-based vs. entropy-based

- Question: could the best discretization ever have two adjacent intervals with the same class?
- Wrong answer: No. For if so,
 - Collapse the two
 - Free up an interval
 - Use it somewhere else
 - (*This is what error-based discretization will do*)
- Right answer: Surprisingly, yes.
 - (*and entropy-based discretization can do it*)

03/04/06


Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

15



Error-based vs. entropy-based

A 2-class, 2-attribute problem

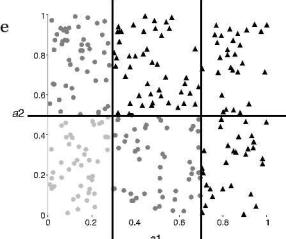

Entropy-based discretization can detect change of class distribution

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

16



The converse of discretization

- Make nominal values into “numeric” ones
- 1. Indicator attributes (used by IB1)
 - Makes no use of potential ordering information
- 2. Code an ordered nominal attribute into binary ones (used by M5')
 - Can be used for any ordered attribute
 - Better than coding ordering into an integer (which implies a metric)
- In general: code subset of attributes as binary

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

17



Data transformations

- Simple transformations can often make a large difference in performance
- Example transformations (not necessarily for performance improvement):
 - Difference of two date attributes
 - Ratio of two numeric (ratio-scale) attributes
 - Concatenating the values of nominal attributes
 - Encoding cluster membership
 - Adding noise to data
 - Removing data randomly or selectively
 - Obfuscating the data

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

18



Principal component analysis

- Method for identifying the important “directions” in the data
- Can rotate data into (reduced) coordinate system that is given by those directions
- Algorithm:
 1. Find direction (axis) of greatest variance
 2. Find direction of greatest variance that is perpendicular to previous direction and repeat
- Implementation: find eigenvectors of covariance matrix by diagonalization
 - Eigenvectors (sorted by eigenvalues) are the directions

03/04/06


Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

19



Example: 10-dimensional data

Axis	Variance	Cumulative
1	61.2%	61.2%
2	18.0%	79.2%
3	4.7%	83.9%
4	4.0%	87.9%
5	3.2%	91.1%
6	2.9%	94.0%
7	2.0%	96.0%
8	1.7%	97.7%
9	1.4%	99.1%
10	0.9%	100.0%

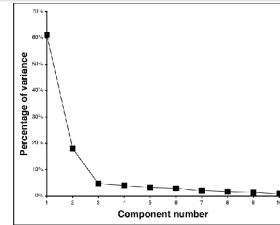

- Can transform data into space given by components
- Data is normally standardized for PCA
- Could also apply this recursively in tree learner

03/04/06 Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

20



Random projections

- PCA is nice but expensive: cubic in number of attributes
- Alternative: use random directions (projections) instead of principle components
- Surprising: random projections preserve distance relationships quite well (on average)
 - Can use them to apply kD-trees to high-dimensional data
 - Can improve stability by using ensemble of models based on different projections

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

21



Text to attribute vectors

- Many data mining applications involve textual data (eg. string attributes in ARFF)
- Standard transformation: convert string into bag of words by *tokenization*
 - Attribute values are binary, word frequencies (f_{ij}), $\log(1+f_{ij})$, or TF \times IDF: $f_{ij} \log \frac{\# \text{documents}}{\# \text{documents that include word } i}$
- Only retain alphabetic sequences?
- What should be used as delimiters?
- Should words be converted to lowercase?
- Should *stopwords* be ignored?
- Should *hapax legomena* be included? Or even just the *k* most frequent words?

03/04/06 Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

22



Time series

- In time series data, each instance represents a different time step
- Some simple transformations:
 - Shift values from the past/future
 - Compute difference (*delta*) between instances (ie. “derivative”)
- In some datasets, samples are not regular but time is given by *timestamp* attribute
 - Need to normalize by step size when transforming
- Transformations need to be adapted if attributes represent different time steps

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

23



Automatic data cleansing

- To improve a decision tree:
 - Remove misclassified instances, then re-learn!
- Better (of course):
 - Human expert checks misclassified instances
- Attribute noise vs class noise
 - Attribute noise should be left in training set (*don't train on clean set and test on dirty one*)
 - Systematic class noise (e.g. one class substituted for another): leave in training set
 - Unsystematic class noise: eliminate from training set, if possible

03/04/06 Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

24



Robust regression

- “Robust” statistical method \Rightarrow one that addresses problem of *outliers*
- To make regression more robust:
 - Minimize absolute error, not squared error
 - Remove outliers (e.g. 10% of points farthest from the regression plane)
 - Minimize *median* instead of *mean* of squares (copes with outliers in x and y direction)
 - Finds narrowest strip covering half the observations

03/04/06


Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

25



Example: least median of squares

Number of international phone calls from Belgium, 1950–1973

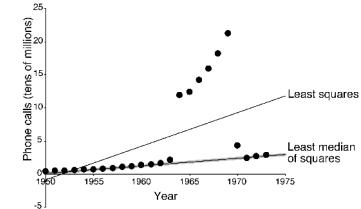

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

26



Detecting anomalies

- Visualization can help to detect anomalies
- Automatic approach:
 - committee of different learning schemes
 - E.g.
 - decision tree
 - nearest-neighbor learner
 - linear discriminant function
 - Conservative approach: delete instances incorrectly classified by them all
 - Problem: might sacrifice instances of small classes

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

27



Combining multiple models

- Basic idea: build different “experts”, let them vote
- Advantage:
 - often improves predictive performance
- Disadvantage:
 - usually produces output that is very hard to analyze
 - but: there are approaches that aim to produce a single comprehensible structure

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

28



Bagging

- Combining predictions by voting/averaging
- Simplest way
- Each model receives equal weight
- “Idealized” version:
 - Sample several training sets of size n (instead of just having one training set of size n)
 - Build a classifier for each training set
 - Combine the classifiers’ predictions
- Learning scheme is *unstable* \Rightarrow almost always improves performance
- Small change in training data can make big change in model (e.g. decision trees)

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

29



Bias-variance decomposition

- Used to analyze how much selection of any *specific* training set affects performance
- Assume infinitely many classifiers, built from different training sets of size n
- For any learning scheme,
 - $Bias$ = expected error of the combined classifier on new data
 - $Variance$ = expected error due to the particular training set used
- Total expected error = bias + variance

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

30



More on bagging

- Bagging works because it reduces *variance* by voting/averaging
 - Note: in some pathological hypothetical situations the overall error might increase
 - Usually, the more classifiers the better
- Problem: we only have one dataset!
- Solution: generate new ones of size n by sampling from it *with replacement*
- Can help a lot if data is noisy
- Can also be applied to numeric prediction
 - Aside: bias-variance decomposition originally only known for numeric prediction

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

31



Bagging classifiers

Model generation

```
Let n be the number of instances in the training data
For each of t iterations:
  Sample n instances from training set
    (with replacement)
  Apply learning algorithm to the sample
  Store resulting model
```

Classification

```
For each of the t models:
  Predict class of instance using model
Return class that is predicted most often
```

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

32



Bagging with costs

- Bagging unpruned decision trees known to produce good probability estimates
 - Where, instead of voting, the individual classifiers' probability estimates are averaged
 - Note: this can also improve the success rate
- Can use this with minimum-expected cost approach for learning problems with costs
- Problem: not interpretable
 - *MetaCost* re-labels training data using bagging with costs and then builds single tree

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

33



Randomization

- Can randomize learning algorithm instead of input
- Some algorithms already have a random component: eg. initial weights in neural net
- Most algorithms can be randomized, eg. greedy algorithms:
 - Pick from the N best options at random instead of always picking the best options
 - Eg.: attribute selection in decision trees
- More generally applicable than bagging: e.g. random subsets in nearest-neighbor scheme
- Can be combined with bagging

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

34



Boosting

- Also uses voting/averaging
- Weights models according to performance
- Iterative: new models are influenced by performance of previously built ones
 - Encourage new model to become an "expert" for instances misclassified by earlier models
 - Intuitive justification: models should be experts that complement each other
- Several variants

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

35



AdaBoost.M1

Model generation

```
Assign equal weight to each training instance
For t iterations:
  Apply learning algorithm to weighted dataset,
    store resulting model
  Compute model's error e on weighted dataset
  If e = 0 or e ≥ 0.5:
    Terminate model generation
  For each instance in dataset:
    If classified correctly by model:
      Multiply instance's weight by e/(1-e)
    Normalize weight of all instances
```

Classification

```
Assign weight = 0 to all classes
For each of the t models (or fewer):
  For the class this model predicts
    add -log e/(1-e) to this class's weight
Return class with highest weight
```

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

36



More on boosting I

- Boosting needs weights ... but
- Can adapt learning algorithm ... or
- Can apply boosting *without* weights
 - resample with probability determined by weights
 - disadvantage: not all instances are used
 - advantage: if error > 0.5, can resample again
- Stems from *computational learning theory*
- Theoretical result:
 - training error decreases exponentially
- Also:
 - works if base classifiers are not too complex, and
 - their error doesn't become too large too quickly

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

37



More on boosting II

- Continue boosting after training error = 0?
- Puzzling fact:
 - generalization error continues to decrease!
 - Seems to contradict Occam's Razor
- Explanation:
 - consider *margin* (confidence), not error
 - Difference between estimated probability for true class and nearest other class (between -1 and 1)
- Boosting works with *weak learners*
 - only condition: error doesn't exceed 0.5
- In practice, boosting sometimes overfits (in contrast to bagging)

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

38



Additive regression I

- Turns out that boosting is a greedy algorithm for fitting additive models
- More specifically, implements *forward stagewise additive modeling*
- Same kind of algorithm for numeric prediction:
 1. Build standard regression model (eg. tree)
 2. Gather residuals, learn model predicting residuals (eg. tree), and repeat
- To predict, simply sum up individual predictions from all models

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

39



Additive regression II

- Minimizes squared error of ensemble if base learner minimizes squared error
- Doesn't make sense to use it with (multiple) linear regression, why?
- Can use it with *simple* linear regression to build multiple linear regression model
- Use cross-validation to decide when to stop
- Another trick: shrink predictions of the base models by multiplying with pos. constant < 1
 - Caveat: need to start with model 0 that predicts the mean

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

40



Additive logistic regression

- Can use the logit transformation to get algorithm for classification
 - More precisely, class probability estimation
 - Probability estimation problem is transformed into regression problem
 - Regression scheme is used as base learner (eg. regression tree learner)
- Can use forward stagewise algorithm: at each stage, add model that maximizes probability of data
- If f_j is the j th regression model, the ensemble predicts probability $p(1 | \vec{a}) = \frac{1}{1 + \exp(-\sum f_j(\vec{a}))}$ for the first class

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

41



LogitBoost

Model generation

```

For i = 1 to t iterations:
  For each instance a[i]:
    Set the target value for the regression to
    z[i] = (y[i] - p(1|a[i])) / [p(1|a[i]) * (1-p(1|a[i]))]
    Set the weight of instance a[i] to p(1|a[i]) * (1-p(1|a[i]))
    Fit a regression model f[i] to the data with class
    values z[i] and weights w[i]
  
```

Classification

```

predict 1st class if p(1 | a) > 0.5, otherwise predict 2nd class
  
```

- Maximizes probability if base learner minimizes squared error
- Difference to AdaBoost: optimizes probability/likelihood instead of exponential loss
- Can be adapted to multi-class problems
- Shrinking and cross-validation-based selection apply

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

42



Option trees

- Ensembles are not interpretable
- Can we generate a single model?
 - One possibility: “cloning” the ensemble by using lots of artificial data that is labeled by ensemble
 - Another possibility: generating a single structure that represents ensemble in compact fashion
- Option tree*: decision tree with option nodes
 - Idea: follow all possible branches at option node
 - Predictions from different branches are merged using voting or by averaging probability estimates


03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

43



Example

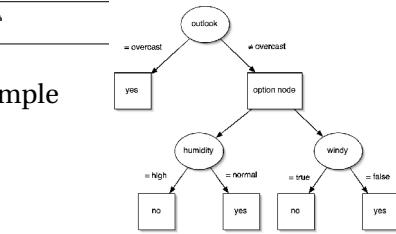

- Can be learned by modifying tree learner:

- Create option node if there are several equally promising splits (within user-specified interval)
- When pruning, error at option node is average error of options

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

44



Alternating decision trees

- Can also grow option tree by incrementally adding nodes to it
- Structure called *alternating decision tree*, with *splitter nodes* and *prediction nodes*
 - Prediction nodes are leaves if no splitter nodes have been added to them yet
 - Standard alternating tree applies to 2-class problems
 - To obtain prediction, filter instance down all applicable branches and sum predictions
 - Predict one class or the other depending on whether the sum is positive or negative


03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

45



Example

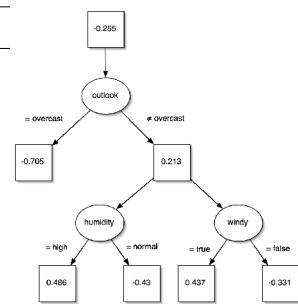

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

46



Growing alternating trees

- Tree is grown using a boosting algorithm
 - Eg. LogitBoost described earlier
- Assume that base learner produces single conjunctive rule in each boosting iteration (note: rule for regression)
- Each rule could simply be added into the tree, including the numeric prediction obtained from the rule
- Problem: tree would grow very large very quickly
- Solution: base learner should only consider candidate rules that extend existing branches
 - Extension adds splitter node and two prediction nodes (assuming binary splits)
- Standard algorithm chooses best extension among all possible extensions applicable to tree
- More efficient heuristics can be employed instead

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

47



Logistic model trees

- Option trees may still be difficult to interpret
- Can also use boosting to build decision trees with linear models at the leaves (ie. trees without options)
- Algorithm for building logistic model trees:
 - Run LogitBoost with simple linear regression as base learner (choosing the best attribute in each iteration)
 - Interrupt boosting when cross-validated performance of additive model no longer increases
 - Split data (eg. as in C4.5) and resume boosting in subsets of data
 - Prune tree using cross-validation-based pruning strategy (from CART tree learner)

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

48



Stacking

- To combine predictions of base learners, don't vote, use *meta learner*
 - Base learners: *level-0 models*
 - Meta learner: *level-1 model*
 - Predictions of base learners are input to meta learner
- Base learners are usually different schemes
- Can't use predictions on training data to generate data for level-1 model!
 - Instead use cross-validation-like scheme
- Hard to analyze theoretically: "black magic"

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

49



More on stacking

- If base learners can output probabilities, use those as input to meta learner instead
- Which algorithm to use for meta learner?
 - In principle, any learning scheme
 - Prefer "relatively global, smooth" model
 - Base learners do most of the work
 - Reduces risk of overfitting
- Stacking can be applied to numeric prediction too

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

50



Error-correcting output codes

- Multiclass problem \Rightarrow binary problems
- Simple scheme: One-per-class coding
- Idea: use *error-correcting codes* instead
 - base classifiers predict 101111, true class = ??
- Use code words that have large *Hamming distance* between any pair
 - Can correct up to $(d - 1)/2$ single-bit errors

class	class vector
a	1000
b	0100
c	0010
d	0001

class	class vector
a	111111
b	0000111
c	0011001
d	0101010

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

51



More on ECOCs

- Two criteria :
 - *Row separation*: minimum distance between rows
 - *Column separation*: minimum distance between columns
 - (and columns' complements)
 - Why? Because if columns are identical, base classifiers will likely make the same errors
 - Error-correction is weakened if errors are correlated
- 3 classes \Rightarrow only 2^3 possible columns
 - (and 4 out of the 8 are complements)
 - Cannot achieve row and column separation
- Only works for problems with > 3 classes

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

52



Exhaustive ECOCs

- *Exhaustive code for k classes*:
- Columns comprise every possible k -string ...
 - ... except for complements and all-zero/one strings
- Each code word contains $2^{k-1} - 1$ bits
- Class 1: code word is all ones
- Class 2: 2^{k-2} zeroes followed by $2^{k-2} - 1$ ones
- Class i : alternating runs of 2^{k-i} 0s and 1s
 - last run is one short

Exhaustive code, $k = 4$	
class	class vector
a	1111111
b	0000111
c	0011001
d	0101010

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

53



More on ECOCs

- More classes \Rightarrow exhaustive codes infeasible
 - Number of columns increases exponentially
- Random code words have good error-correcting properties on average!
- There are sophisticated methods for generating ECOCs with just a few columns
- ECOCs don't work with NN classifier
 - But: works if different attribute subsets are used to predict each output bit

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

54



Using unlabeled data

- *Semisupervised learning*: attempts to use unlabeled data as well as labeled data
 - The aim is to improve classification performance
- Why try to do this? Unlabeled data is often plentiful and labeling data can be expensive
 - Web mining: classifying web pages
 - Text mining: identifying names in text
 - Video mining: classifying people in the news
- Leveraging the large pool of unlabeled examples would be very attractive

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

55



Clustering for classification

- Idea: use naïve Bayes on labeled examples and then apply EM
 - First, build naïve Bayes model on labeled data
 - Second, label unlabeled data based on class probabilities (“expectation” step)
 - Third, train new naïve Bayes model based on all the data (“maximization” step)
 - Fourth, repeat 2nd and 3rd step until convergence
- Essentially the same as EM for clustering with fixed cluster membership probabilities for labeled data and #clusters = #classes

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

56



Comments

- Has been applied successfully to document classification
 - Certain phrases are indicative of classes
 - Some of these phrases occur only in the unlabeled data, some in both sets
 - EM can generalize the model by taking advantage of co-occurrence of these phrases
- Refinement 1: reduce weight of unlabeled data
- Refinement 2: allow multiple clusters per class

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

57



Co-training

- Method for learning from *multiple views* (multiple sets of attributes), eg:
 - First set of attributes describes content of web page
 - Second set of attributes describes links that link to the web page
- Step 1: build model from each view
- Step 2: use models to assign labels to unlabeled data
- Step 3: select those unlabeled examples that were most confidently predicted (ideally, preserving ratio of classes)
- Step 4: add those examples to the training set
- Step 5: go to Step 1 until data exhausted
- Assumption: views are independent

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

58



EM and co-training

- Like EM for semisupervised learning, but view is switched in each iteration of EM
 - Uses all the unlabeled data (probabilistically labeled) for training
- Has also been used successfully with support vector machines
 - Using logistic models fit to output of SVMs
- Co-training also seems to work when views are chosen randomly!
 - Why? Possibly because co-trained classifier is more robust

03/04/06

Data Mining: Practical Machine Learning Tools and Techniques (Chapter 7)

59